


## DRMKITP 24VAC 4CO LD/PB

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

### Product image

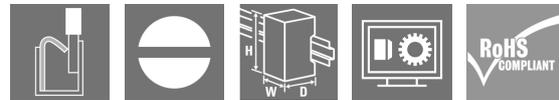

Similar to illustration

- Mounted kit consisting relay, socket and retaining clip
- 100 % function tested
- 100 % check of the dielectric strenght between input - output
- 4 CO contacts
- With mechanical status indicator
- Optional Test button with coloured identification of coils (AC red / DC blue)
- Bright status LED (AC coil: red / DC coil: green)

### General ordering data

|                |  |
|----------------|--|
| Version        | D-SERIES DRM, Relay module, Number of contacts: 4, CO contact AgNi flash gold-plated, Rated control voltage: 24 V AC, Continuous current: 5 A, PUSH IN, Test button available: Yes |
| Order No.      | <a href="#">2576 100000</a>  |
| Type           | DRMKITP 24VAC 4CO LD/PB  |
| GTIN (EAN)     | 4050 118585858   |
| Qty.           | 10 pc(s).  |
| Relevant base  | <a href="#">7760056363</a>   |
| Relevant relay | <a href="#">7760056101</a>   |

Creation date June 12, 2025 11:29:47 AM CEST

Catalogue status 07.06.2025 / We reserve the right to make technical changes.

## DRMKITP 24VAC 4CO LD/PB

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

|            |           |                 |            |
|------------|-----------|-----------------|------------|
| Depth      | 82.3 mm   | Depth (inches)  | 3.24 inch  |
| Height     | 101.8 mm  | Height (inches) | 4.008 inch |
| Width      | 30.6 mm   | Width (inches)  | 1.205 inch |
| Net weight | 108.614 g |                 |            |

### Temperatures

|                     |  |                       |                |
|---------------------|--|-----------------------|----------------|
| Storage temperature | -40 °C...70 °C                           | Operating temperature | -40 °C...55 °C |
| Humidity            | 35...85 % rel. humidity, no condensation |                       |                |

### Control side

|                       |                    |                  |                 |
|-----------------------|--------------------|------------------|-----------------|
| Rated control voltage | 24 V AC            | Rated current AC | 62.4 mA (50 Hz) |
| Power rating          | 1.0...1.2VA (60HZ) | Coil resistance  | 160 Ω ± 10 %    |
| Status indicator      | red LED            |                  |                 |

### Load side

|   |                                       |   |                                       |
|---|---------------------------------------|---|---------------------------------------|
| Rated switching voltage                 | 250 V AC                              | Continuous current                      | 5 A                                   |
| Max. switching frequency at rated load  | 0.1 Hz                                | Max. switching voltage, AC              | 250 V                                 |
| Inrush current                          | 10 A / 50 ms                          | AC switching capacity (resistive), max. | 1250 VA                               |
| DC switching capacity (resistive), max. | 120 W @ 24 V                          | Switch-on delay                         | <20 ms                                |
| Switch-off delay                        | <20 ms                                | Contact type                            | 4 CO contact (AgNi flash gold-plated) |
| Mechanical service life                 | 20 x 10 <sup>6</sup> switching cycles | Min. switching power                    | 10 mA @ 12 V, 100 mA @ 5 V            |

### General data

|                                      |   |                        |
|--------------------------------------|---|------------------------|
| Rail                                 | TS 35                                       |                        |
| Test button available                | Yes   |                        |
| Version of test button               | Lockable test button, Momentary test button |                        |
| Mechanical switch position indicator | Yes   |                        |
| Colour                               | black                                       |                        |
| UL94 flammability rating component   | Component                                   | Housing                |
|                                      | UL94 flammability rating                    | V-2                    |
|                                      | Component                                   | Pusher                 |
|                                      | UL94 flammability rating                    | HB                     |
|                                      | Component                                   | Mounting foot          |
|                                      | UL94 flammability rating                    | HB                     |
|                                      | Component                                   | Retaining clip         |
|                                      | UL94 flammability rating                    | HB                     |
|                                      | Component                                   | Relay cover            |
|                                      | UL94 flammability rating                    | V-2                    |
|                                      | Component                                   | Relay baseplate        |
|                                      | UL94 flammability rating                    | V-0                    |
|                                      | Component                                   | Relay status indicator |
|                                      | UL94 flammability rating                    | HB                     |
| Component                            | Relay test button                           |                        |
| UL94 flammability rating             | HB  |                        |

**DRMKITP 24VAC 4CO LD/PB**
**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data**
**Insulation coordination**

|   |                             |  |                                |
|---|-----------------------------|--|--------------------------------|
| Rated voltage   | 250 V                       | Pollution severity                               | 2                              |
| Surge voltage category  | III                         | Insulating material group                        | C                              |
| Clearance and creepage distances for control side - load side | ≥ 3 mm                      | Dielectric strength for control side - load side | 1.8 kV <sub>eff</sub> / 1 min. |
| Dielectric strength of neighbouring contacts                  | 1 kV <sub>eff</sub> / 1 min | Dielectric strength of open contact              | 1 kV <sub>eff</sub> / 1 min    |
| Protection degree   | IP20                        |  |                                |

**Further details of approvals / standards**

|                               |         |                              |         |
|-------------------------------|---------|------------------------------|---------|
| Certificate no. (cURus) relay | E312083 | Certificate no. (cURus) base | E355547 |
|-------------------------------|---------|------------------------------|---------|

**Connection data**

|   |                     |   |                      |
|---|---------------------|---|----------------------|
| Wire connection method  | PUSH IN             | Stripping length, rated connection  | 10 mm                |
| Clamping range, rated connection  | 1.5 mm <sup>2</sup> | Clamping range, min.  | 0.14 mm <sup>2</sup> |
| Clamping range, max.  | 1.5 mm <sup>2</sup> | Wire connection cross section AWG, min.   | AWG 26               |
| Wire connection cross section AWG, max.   | AWG 16              | Wire cross-section, solid, min.   | 0.14 mm <sup>2</sup> |
| Wire cross-section, solid, max.   | 1.5 mm <sup>2</sup> | Wire connection cross section, finely stranded, min.                                    | 0.14 mm <sup>2</sup> |
| Wire connection cross section, finely stranded, max.                                    | 1.5 mm <sup>2</sup> | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.14 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 1 mm <sup>2</sup>   | Conductor cross-section, flexible, AEH (DIN 46228-1), min.                              | 0.14 mm <sup>2</sup> |
| Conductor cross-section, flexible, AEH (DIN 46228-1), max.                              | 1.5 mm <sup>2</sup> | Blade size  | 0.4 x 2.5 mm         |

**Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001437    | ETIM 7.0    | EC001437    |
| ETIM 8.0    | EC001437    | ETIM 9.0    | EC001437    |
| ETIM 10.0   | EC001437    | ECLASS 9.0  | 27-37-16-01 |
| ECLASS 9.1  | 27-37-16-01 | ECLASS 10.0 | 27-37-16-01 |
| ECLASS 11.0 | 27-37-16-01 | ECLASS 12.0 | 27-37-16-01 |
| ECLASS 13.0 | 27-37-16-01 | ECLASS 14.0 | 27-37-16-01 |
| ECLASS 15.0 | 27-37-16-01 |             |             |

**Environmental Product Compliance**

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

**Approvals**

Approvals



|                 |   |
|-----------------|---|
| Approvals MAMID | <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/</a> <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319260/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319260/-T1z1mm-S800/</a> |
| ROHS            | Conform   |

Creation date June 12, 2025 11:29:47 AM CEST

Catalogue status 07.06.2025 / We reserve the right to make technical changes.

3

**DRMKITP 24VAC 4CO LD/PB**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Technical data****Downloads**

---

|   |   |
|---|---|
| Approval/Certificate/Document of Conformity | <a href="#">EU Konformitätserklärung / EU Declaration of Conformity</a> |
| Engineering Data                            | <a href="#">CAD data – STEP</a>   |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>                                |

---


**DRMKITP 24VAC 4CO LD/PB**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany


www.weidmueller.com

**Drawings**


**Wiring diagram**

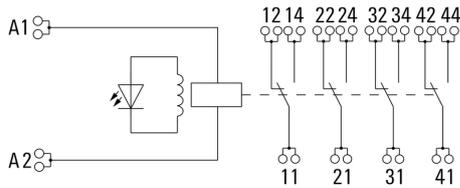


**Graph**

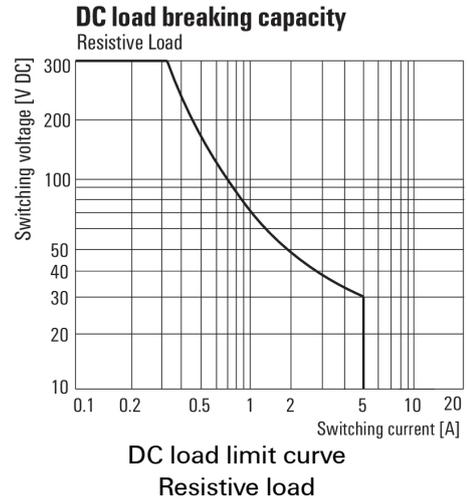


**Graph**

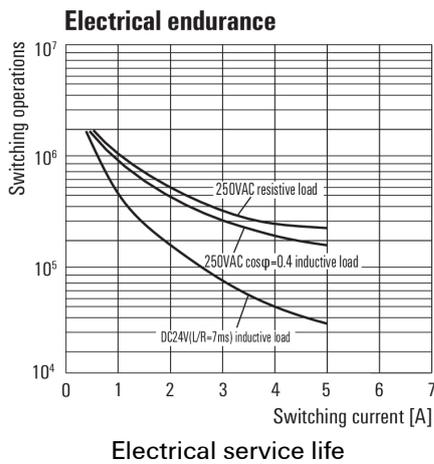


**Graph**

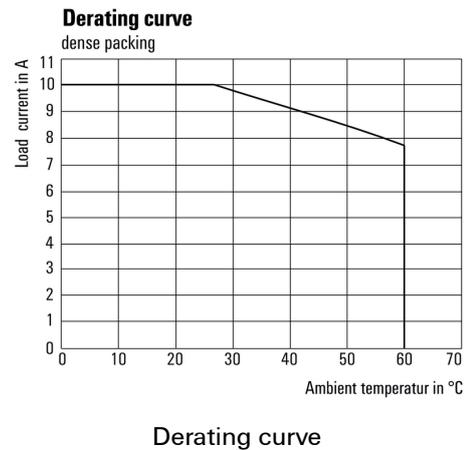

**Graph**

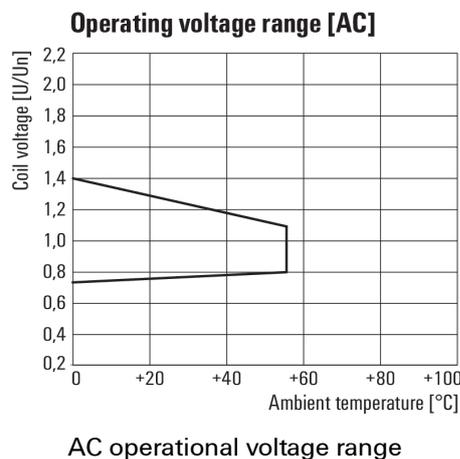

**Dimensional drawing**

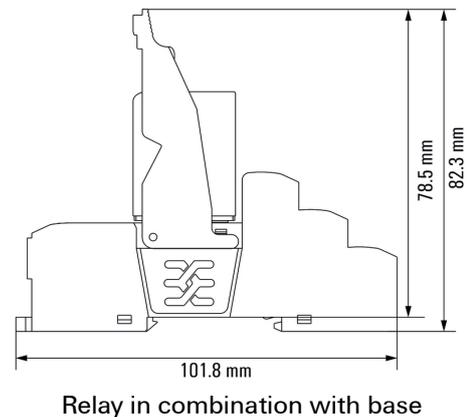


**DRMKITP 24VAC 4CO LD/PB**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

Drawings

Miscellaneous

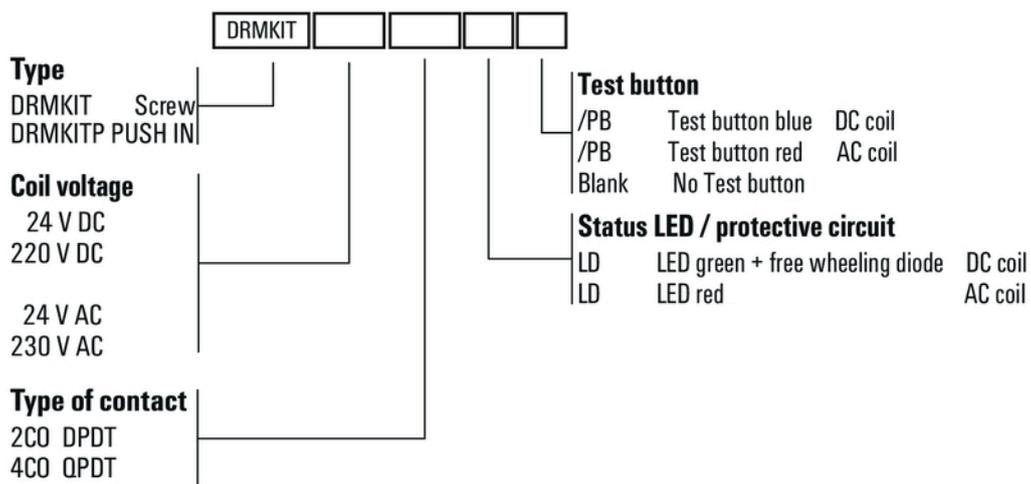

Type codes